

LED Panel Meters


LED數位顯示錶



KC-881N



KC-881P

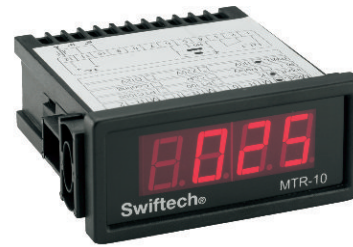

MTR-10



XT11S

Features

- LED digital display, suitable for various input model.
- Display range : 0~1999.
- The outer covering uses ABS fireproof material to offer high-security.

Specifications

Model	KC-881N	KC-881P	MTR-10	XT11S
Product name	Digital Display Meter		Digital Display Meter	Tem. Display Meter
Size	96Wx48Hx93D mm		78Wx35Hx77D mm	
Panel cutout size	91Wx45H mm		70Wx28H mm	
LED size	0.56" 4 digit	0.8" 4 digit	0.56" 3 ½ digit	0.52" 3 digit
weight	200g	210g	170g	100g
Input type	K/J/PT100Ω/0-10V/1-5V/4-20mA		K/J/PT100Ω/0-10V/1-5V/4-20mA	PTC-1K
Range	-1999 ~ 9999		-10 ~ 1200°C	-20 ~ 40°C
Ambient Humidity	50 ~ 85% RH		50 ~ 85% RH	20 ~ 85% RH
Ambient Temperature	-20°C ~ 85°C		-10°C ~ +50°C	0 ~ 60°C
Accuracy	±0.15%		±1°C	
Resolution	±0.15%		±1°C	
Power consumption	4 VA		2.0W	
Contact	5A 240VAC		5A 240VAC	
Power supply	AC 85~265V, 50/60Hz		AC 230V/2VA	
Installs the fitting	Panel mounting		Panel mounting	

External dimensions

Dim.	A	B	C	D	E	F	G	H
MTR-10	70	28	88	50	77	70	28	7
KC-881N KC-881P	91	45	111	68	93	80	91	13
XT11S	64	30	30	50	33	31	26	2

