


# Solid State Relays

固態繼電器

\* 3 Phase Solid State Relays



A1241      D1241      mA4240      R2441A




(\*Detailed specifications please contact with the business.)

## Features

- Low price, long service life and High efficiency products.
- The uniform size for easy of installation.
- Switch ON-OFF rapidly, multi-purpose and easy to operation.
- Red light lamp easy for movement confirmation.
- Low noise can be isolated outside of the 2500 VRMS.

## External dimensions



## Specifications


AC - AC				DC - AC			
Model	A2425	A2441	A1241	Model	D2425	D2441	D1241
Load current	25A	41A	41A	Load current	25A	41A	41A
Input	80~240VAC	80~240VAC	80~240VAC	Input	3-32VDC	3-32VDC	12-32VDC
Output	80~240VAC	80~240VAC	80~480VAC	Output	80~240VAC	80~240VAC	80~480VAC

mA - AC				VR - AC			
Model	mA2425	mA2441	mA2441A	Model	R2425	R2441	R2441A
Load current	25A	41A	41A	Load current	25A	41A	41A
Input	DC4-20mA	DC4-20mA	DC4-20mA	Input	VR100K	VR100K	VR50K
Output	80~240VAC	80~240VAC	80~480VAC	Output	80~240VAC	80~240VAC	80~480VAC

## Heatsink



SG-B(A000801)

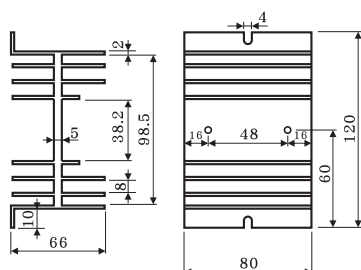

SG-A(K414-50W)

